



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 666 475 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 95200150.1

(51) Int. Cl.⁶: G01N 33/04, A01J 5/00

(22) Date of filing: 23.01.95

(30) Priority: 28.01.94 NL 9400132

(72) Inventor: van der Lely, Cornelis
7, Brüschenrain
CH-6300 Zug (CH)

(43) Date of publication of application:
09.08.95 Bulletin 95/32

(64) Designated Contracting States:
DE FR GB NL SE

(74) Representative: Mulder, Herman et al
Octroolbureau Van der Lely N.V.
Weverskade 10
NL-3155 PD Maasland (NL)

(71) Applicant: MAASLAND N.V.
Weverskade 10
NL-3155 PD Maasland (NL)

(54) A construction for milking animals.

(57) The invention relates to an construction including at least one implement for milking animals, such as cows. A milk checking member (10) for determining a grade of a milk component, such as the fat grade,

is provided at or near the implement. The contents of the milk components can be read from a display screen (12) which is part of the construction.

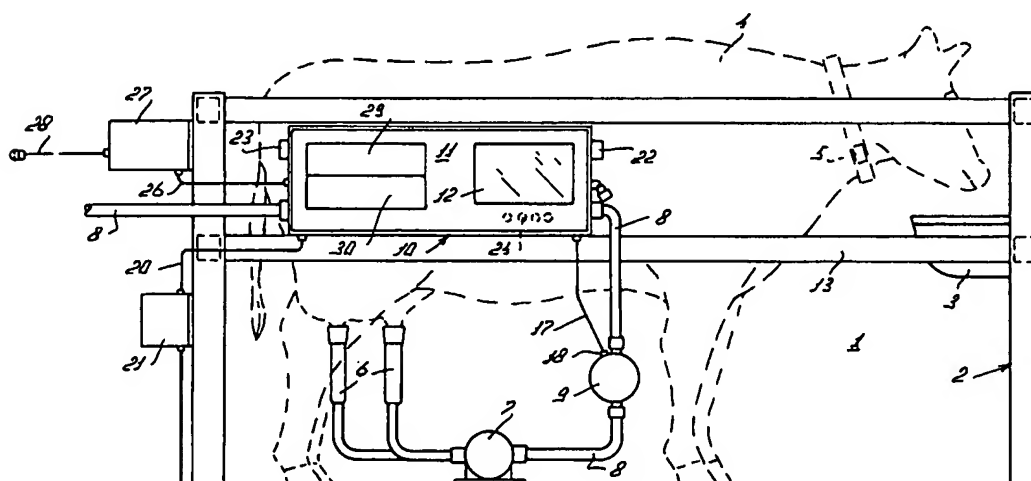


Fig. 1

EP 0 666 475 A2

The invention relates to a construction including at least one implement for milking animals, such as cows.

Constructions of this type are known.

The milk obtained by means of the said construction is usually checked to determine its quality and its grades. Milk is a very valuable nutrient. Not only the vitamins, but especially the fat and the albumen are important for health. For this reason not only the milk yield of an animal is recorded, but also the milk is checked for its grade of fat and albumen. On the basis of the quality of the milk it is determined whether the milk is suitable for consumption, whilst payment of the milk may also be effected on this quality basis. As regards checking of the milk, more particularly as regards checking of e.g. the fat grade and/or the albumen grade of the milk, laboratories must be called upon, whereby such laboratories may be at a large distance from the location where the milk is obtained. It takes quite some time before a farmer has these data available, and only then he can take measures if deviations in the said grades occur. It is undesirable that time will be lost or may be lost between the moment the farmer can act and the knowledge that a given animal does not produce optimally, as such a delay has a negative effect on the quality and ultimately on the price the farmer receives for his milk.

The invention has for its object to provide a construction of the above-defined type, in which the said disadvantages do not occur or in which these disadvantages are at least obviated to a significant extent.

According to the invention, this is achieved in that the construction includes a milk checking member, with the aid of which the checking of the milk ingredients can take place, whereby the construction is comprising means for measuring data which can be dispatched by the telephone or such medium to a person being at a distance from the construction. A checking member can be a member for checking the percentage of the milk fat and of other ingredients in the milk. The construction includes a milk checking member, with the aid of which gauging of the milk can take place, whereby the construction is comprising means for measuring data which can be dispatched by the telephone or such medium to a person being at a distance from the construction. The person, who may be employed by the Herd Registry Office, can on the basis of the aforesaid data determine the characteristics as regards the fat and/or the albumen percentages of the animal's milk and/or the milk yield. These data can be recorded via a telephone line in the Herd Registry Office, so that the relevant pedigree, which may optionally have been stored in the computer, is updated with the latest up-to-date

data of the animal and is immediately available. The farmer can also check his cattle from a distance, which is advantageous when he lives at a distance from his cattle. In order to promote a reliable sampling, the milk checking member is provided, in accordance with the invention, with gauging means. The invention, therefore, also relates to an construction including at least one implement for the milking of animals, such as cows, characterized in that the construction includes a milk checking member, with the aid of which measurements of the grade of the milk can be made.

In a preferred embodiment of the invention, the fat and/or albumen grades of the milk can be determined by means of the milk checking member, whilst the milk checking member is further of such a design that at least two different types of milk or other substances required for gauging can be fed into the milk checking member.

In accordance with a further feature of the invention, the construction comprises a milking robot connected to the milk checking member which has a display screen, on which the grade of a milk component can be read during and after a milking.

The above construction is particularly suitable for use together with a milking robot. In that case the farmer can fully concentrate on the performances of his animals, related to the percentages of the milk components displayed on the display screen. When an animal enters the milking box, the milking robot checks whether a given animal is to be milked. After it has been ascertained that the animal is to be milked, in accordance with the invention, teat cups are connected to the teats of the relevant animal with the aid of the milking robot, whereafter milking can be started. During the milking procedure, in accordance with a feature of the invention, the grade of a milk component can directly be read from a display screen which is part of the milk checking member. The invention, therefore, also relates to a construction including at least one implement for the milking of animals, such as cows, characterized in that the construction includes a milking robot which is connected to the milk checking member which has a display screen, on which the grade of a milk component can be read during milking. In accordance with a still further feature of the invention, the milk samples required for the milk checking member can be discharged separately from the milk intended for consumption purposes. The invention, therefore, also relates to an construction including at least one implement for the milking of animals, such as cows, characterized in that the construction includes a milk checking member for determining the grade of a milk component, as well as means with the aid of which the milk samples required for sampling can be discharged separately from the

milk intended for consumption purposes.

In accordance with another feature of the invention, the construction includes a milking box to which the milk checking member is attached. This gives the farmer the opportunity to check the performances of his animals in the milking parlour. In an implementation in accordance with the invention, the display screen of the milk checking member may be in a location remote from the arrangement, e.g. in a house or in a farm building. So as to determine the quantity of milk supplied by each animal, the construction includes, in accordance with a further feature of the invention, a milk quantity meter. In accordance with a still further feature of the invention, the fat grade and/or the albumen grade and/or the quantity of milk obtained during a milking turn can be read from the display screen. In accordance with another feature of the invention, the data collected during sampling of the milk are automatically processed in a management computer which is part of the construction. With the aid of the management computer it is possible to store, combine and/or to interrelate the above data, so that certain conclusions can be drawn therefrom. Thus, in accordance with a further feature of the invention, the data collected during sampling of the milk can, for example, be transmitted via a modem forming part of the construction to the Herd Registry Office and/or to the Milk Sanitation Office.

In accordance with a feature of the invention, the milk checking member includes a sealable control box. Thus, the milk checking member is only accessible to a limited number of persons. In accordance with a further feature of the invention, the milk checking member is provided with gauging means for gauging the milk checking member. In accordance with a further feature of the invention, the gauging means include an inlet and an outlet, via which a liquid suitable for gauging, e.g. milk of a known grade, can be fed to and discharged from the milk checking member. In accordance with a feature of the invention, the gauging means further include a reset circuit which can be activated when on the display screen there appears a value which differs from the actual, pre-known value of the grade of said gauging liquid. The reset switch has a plurality of correction buttons which are accessible after the said seal has been broken. Since the gauging means can be used at any moment, it is possible to always perform a very accurate determination of a grade by means of the milk checking member.

There is known a variety of apparatuses and systems for measuring the fat and albumen grades, such as a butyrometer. To determine the fat grade, the Gerber, Babcock and Röse-Gottlieb systems are generally known. Measuring albumen-protein can be effected on a more chemical basis in accor-

dance with Kjeldahl. Furthermore, the measurements can be performed by means of sensors.

According to the invention, the milk checking member can employ the Gerber, the Babcock or the Röse-Gottlieb systems to determine the fat grade. In accordance with another feature of the invention, the milk checking member can employ the Kjeldahl system to determine the albumen grade.

It will be obvious that the invention is not limited to the above systems, but that any other system suitable for determining a grade of a milk component can be used.

In order to realize a high degree of accuracy and reliability of the conclusions drawn on the basis of the samples, the milking robot is, in accordance with a further feature of the invention, permanently in operation and approximately 1000 sampling operations per animal are performed annually for each milk component. For the purpose of storing the data collected therefrom and, optionally, reading these data of each animal at a later instant, the construction includes, in accordance with a feature of the invention, a cow identification system.

For a better understanding of the invention and to show how the same may be carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 is a side view of a construction for milking animals, which construction includes a milk checking member for determining a grade of a milk component, and

Figure 2 shows the milk checking member as shown in Figure 1.

Figure 1 shows a construction for milking animals, which construction comprises a milking box 1 having a railing 2, to which a feed trough 3 is attached. The contours of a cow 4 are shown in the milking box 1. A transponder 5, which is part of a (non-shown) cow identification system, is disposed around the neck of the cow 4. By means of the cow identification system, by reading the transponder 5, the identity of the animal 4 present in the milking box 1 can be determined.

The construction for milking animals preferably comprises a (non-shown) milking robot, with the aid of which teat cups 6 can automatically be connected to the teats of an animal 4. It will be obvious that the invention is not limited to an embodiment comprising a milking robot, but that the construction for milking animals may alternatively be provided with teat cups 6 which can be connected manually to the teats of an animal 4.

As is shown in Figure 1, the construction for milking animals includes a pump 7, with the aid of which the milk obtained can be pumped through a milk line 8 to a (non-shown) milk tank. In the milk

line 8 there is incorporated a milk quantity meter 9, which determines the quantity of milk supplied by an animal during each milking turn. The milk quantity meter 9 may be in the form of a flow meter, a milk collecting glass, a weight measuring device, etc. In addition, the milk line 8 further includes a milk checking member 10 for the determination of a grade of a milk component, such as the fat grade, the albumen grade, etc. The milk checking member 10 comprises a control box 11 with a display screen 12. The control box 11 is disposed aside of the milking box 1 on a cross-beam 13 of the railing 2. As is shown in Figure 2, at one side of the control box 11 there is arranged a first connecting nipple 14, to which the milk supply line 8 is connected. At the other side of the control box 11 there is arranged a second connecting nipple 15, to which the milk discharge line 8 is connected, through which line the milk, after having flown through the milk checking member, is discharged to the milk tank. A first terminal for the electric line 17 of a sensor 18 of the milk quantity meter 9 is arranged at the bottom side of the control box 11. Via the electric line 17, the sensor 18 applies to the milk checking member 10 a signal, which represents the rate of flow in the milk line 8.

At the bottom side of the control box 11 there is a further, second terminal 19, to which can be connected an electric line 20 which provides the milk checking member 10 with current. As is shown in Figure 1, an emergency energy source 21 is incorporated in the electric line 20, which is switched-on in the event of a power cut.

The milk checking member 10 further includes gauging means, with the aid of which the grade determined by the milk checking member 10 can be gauged and displayed on the display screen 12. The gauging means have a third connecting nipple 22, via which the types of milk or other substances composed specifically for gauging purposes can be supplied to the milk checking member 10. The substances supplied for gauging via the third connecting nipple 22 are automatically discharged through a connecting nipple 23, which is disposed on the control box 11 and to which a (non-shown) reservoir can be connected. In addition, the gauging means have a plurality of correction buttons 24, which are accommodated in the control box 11 and with the aid of which the digits displayed on the display screen 12 can be adjusted, when there is displayed a grade different from the previously known grade of the liquid suitable for gauging. So as to prevent an unauthorized person from getting access to the interior of the control box 11, this control box is provided with a seal 25, which must be broken to allow access thereto. For example, an inspector can perform one or several times per annum a gauging of the milk checking member,

using three types of milk having known fat, albumen, etc. grade (e.g. 4%, 5% and 6%). In the case of deviating values, the inspector can adjust the milk checking member by opening the sealed wall and setting the correct values by means of the correction buttons 24.

In addition, a modem 27 is connected to the control box 11 via an electric line 26. By means of the modem 27, data collected by the milk checking member 10 can be transmitted via a telephone line 28 to a remote computer and/or display screen. The milk checking member may also be connected to the Herd Registry Office and/or to the Milk Sanitation Office. A person working at the Herd Registry Office can look into the data collected for a given animal and consequently determine the quality of her milk, without paying a visit to the farmer.

The computer installed in the house or in the farm building is preferably provided with a management program which can combine the data collected by the milk checking member 10, so that thereafter the farmer can read useful information on e.g. the health of the animal, the quality of the milk, how the lactation period proceeds, etc.

Since at the end of the lactation period the albumen grade, the quantity of milk supplied in each milking turn and the fat grade may vary significantly, the data of approximately one thousand samples of the aforesaid components per animal are stored in the said computer, so that on the basis of these data the reliability of the conclusions related thereto is increased.

The arrangement described in the foregoing operates as follows:


When an animal enters the milking box 1, the identity of the animal is determined by means of the cow identification system. Based on the period of time elapsed since the last time the relevant animal was milked, it is determined whether the animal is to be milked. In the case the construction includes a milking robot, the teat cups are connected automatically to the teats of the animal to be milked. The pump 7 is thereafter activated and the milk obtained is then pumped to the milk tank through the milk line 8. The milk then first passes the milk quantity meter 9 with the sensor 18, which applies a signal to the milk checking member 10 via the electric line 17. The display screen 12 of the milk checking member then permanently displays the quantity of milk supplied during the milking turn. Of the milk supplied via the milk line 8 to the milk checking member, the grade of a plurality of components is analyzed in the analyzing members 29, 30 which are accommodated in the control box and which make use of known per se techniques, such as the Gerber, the Babcock and the Röse-Gottlieb systems for determining the fat

grade and the Kjeldahl system for determining albumen and protein. The determination of the grade of a milk component is also possible by means of sensors. During and/or after the milking turn, the farmer can read the fat grade, the albumen grade and the milk yield from the display screen 12. These data are optionally also transferred via the modem 27 to the (management) computer, where they are stored and processed. On the basis of aforesaid data, the farmer can accurately check the performances of his animals and, if necessary, can make changes in e.g. the feeding pattern of the animal and in the composition of the fodder.

Claims

1. A construction comprising at least one implement for the milking of animals, such as cows, characterized in that the construction includes a milk checking member (10), with the aid of which the checking of the milk ingredients can take place, whereby the construction is comprising means for measuring data which can be dispatched by the telephone or such medium to a person being at a distance from the construction.
2. A construction as claimed in claim 1, characterized in that the milk checking member (10) includes gauging means.
3. A construction comprising at least one implement for the milking of animals, such as cows, characterized in that the construction includes a milk checking member (10), with the aid of which measurements of the grade of the milk can be made, as well as means, with the aid of which the milk checking member (10) can be gauged.
4. A construction as claimed in one or more of the preceding claims, characterized in that with the aid of the milk checking member (10) the fat grade and/or the albumen grade of the milk can be determined, whilst the milk checking member (10) is further of such a design that at least two different types of milk or other substances required for gauging purposes can be fed to it.
5. A construction comprising at least one implement for the milking of animals, such as cows, characterized in that with the aid of the milk checking member (10) the fat grade and/or the albumen grade of the milk can be determined, whilst the milk checking member (10) is further of such a design that at least two different, specifically composed types of milk or other substances required for gauging purposes can be fed to it.
6. A construction as claimed in one or more of the preceding claims, characterized in that the construction includes a milking robot connected to the milk checking member (10) which has a display screen (12), on which the grade of a milk component is directly readable during a milking turn.
7. A construction as claimed in one or more of the preceding claims, characterized in that the milk samples required for the milk checking member (10) can be discharged separately from the milk intended for consumption purposes.
8. A construction as claimed in one or more of the preceding claims, characterized in that the construction includes a milking box (1), to which the milk checking member (10) is attached.
9. A construction as claimed in claim 6, characterized in that the display screen (12) is accommodated remotely from the construction, e.g. in a house or in a farm building.
10. A construction as claimed in one or more of the preceding claims, characterized in that the construction includes a milk quantity meter (9).
11. A construction as claimed in one or more of the preceding claims, characterized in that the fat grade and/or the albumen grade and/or the quantity of milk can be read from the display screen (12) during milking.
12. A construction as claimed in one or more of the preceding claims, characterized in that the data collected during the milk sampling operation are automatically processed in a management computer which is part of the construction.
13. A construction as claimed in one or more of the preceding claims, characterized in that the data collected during the milk sampling operation are transmitted via a modem (27) which is part of the construction to the Herd Registry Office.
14. A construction as claimed in one or more of the preceding claims, characterized in that the milk checking member includes a sealable control box (11).

15. A construction as claimed in one or more of the preceding claims, characterized in that the gauging means include an inlet (22) and an outlet (23), via which a liquid suitable for gauging, such as milk of a known grade, can be fed to and discharged from the milk checking member (10). 5
16. A construction as claimed in claim 15, characterized in that the gauging means include a reset circuit which can be activated when the display screen (12) displays a value which differs from the actual, pre-known value of the grade of said gauged liquid. 10
17. A construction as claimed in one or more of the preceding claims, characterized in that the milk checking member (10) employs the fat grade determination in accordance with the Gerber system. 15
18. A construction as claimed in one or more of claims 1 to 16, characterized in that the milk checking member (10) employs the fat grade determination in accordance with the Babcock system. 20
19. A construction as claimed in one or more of claims 1 to 16, characterized in that the milk checking member (10) employs the fat grade determination in accordance with the Röse-Gottlieb system. 25
20. A construction as claimed in one or more of the preceding claims, characterized in that the milk checking member (10) employs the albumen grade determination in accordance with the Kjeldahl system. 30
21. A construction as claimed in one or more of claims 1 to 16, characterized in that the milk checking member (10) determines the grade of one or more milk components, such as the albumen and/or fat grades, with the aid of sensors. 35
22. A construction as claimed in one or more of the preceding claims, characterized in that the milking robot is permanently in operation, and that annually for each milk component approximately 1000 sampling operations per cow are performed. 40
23. A construction as claimed in one or more of the preceding claims, characterized in that the arrangement includes a cow identification system. 45
24. A construction as claimed in one or more of the preceding claims and/or as described in the accompanying description with reference to the accompanying drawings. 50

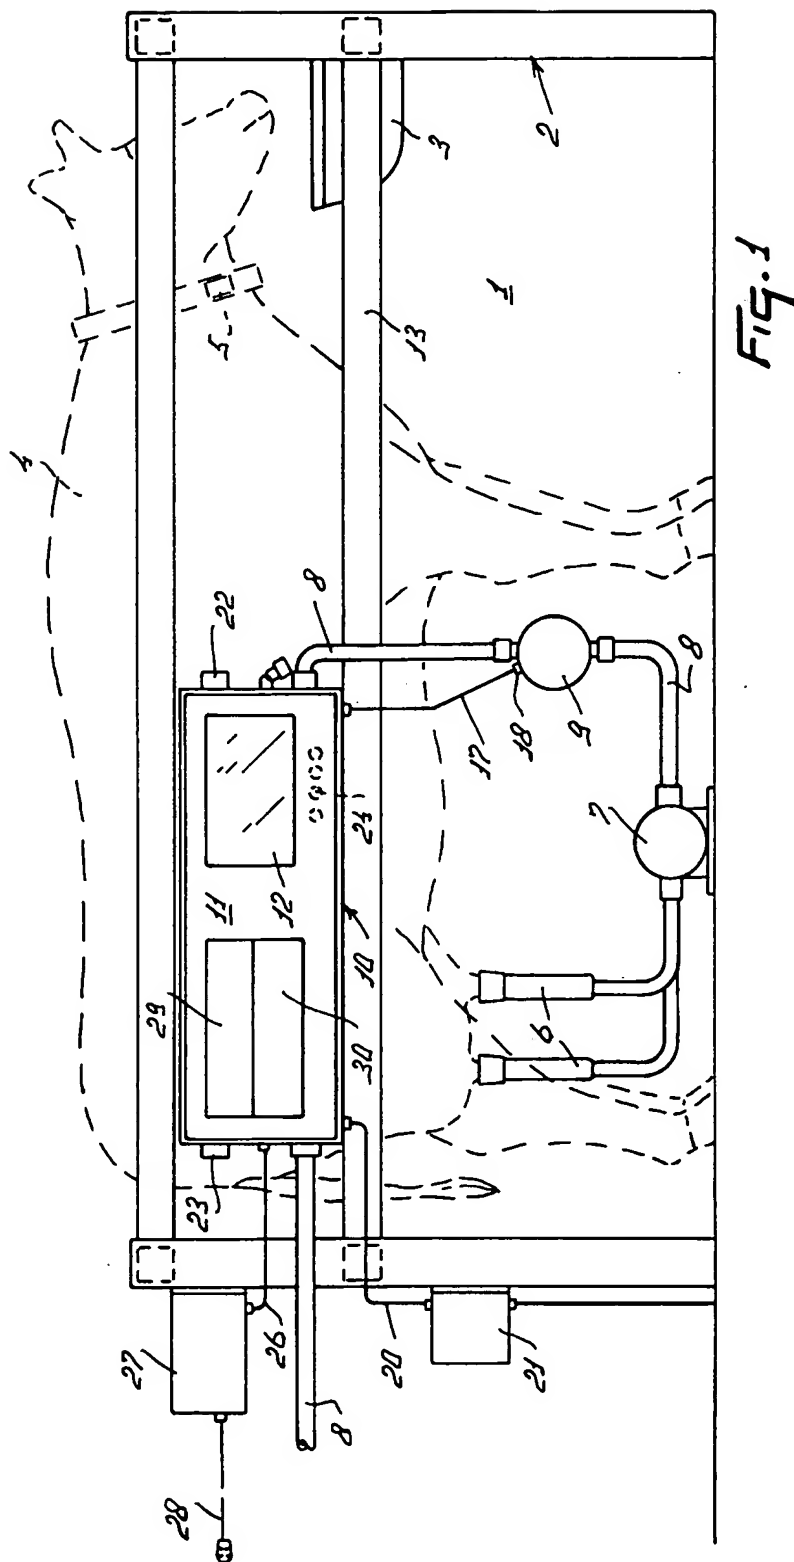

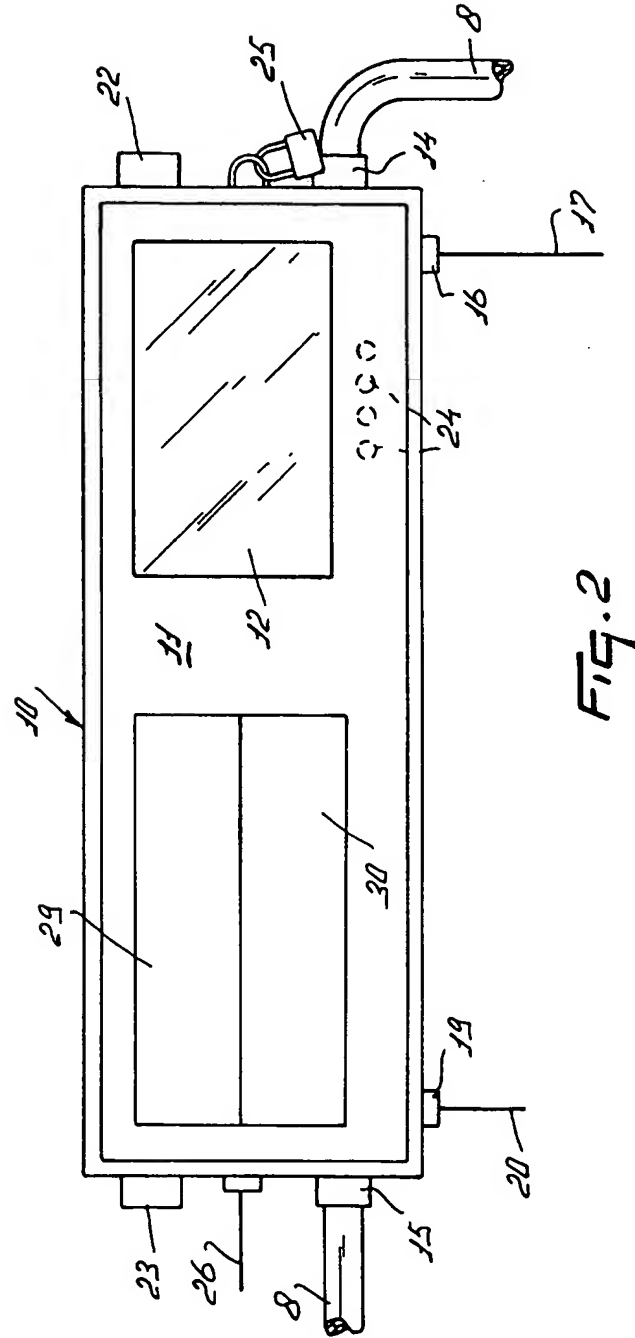


FIG. 2